


# Electric Programmable Controller

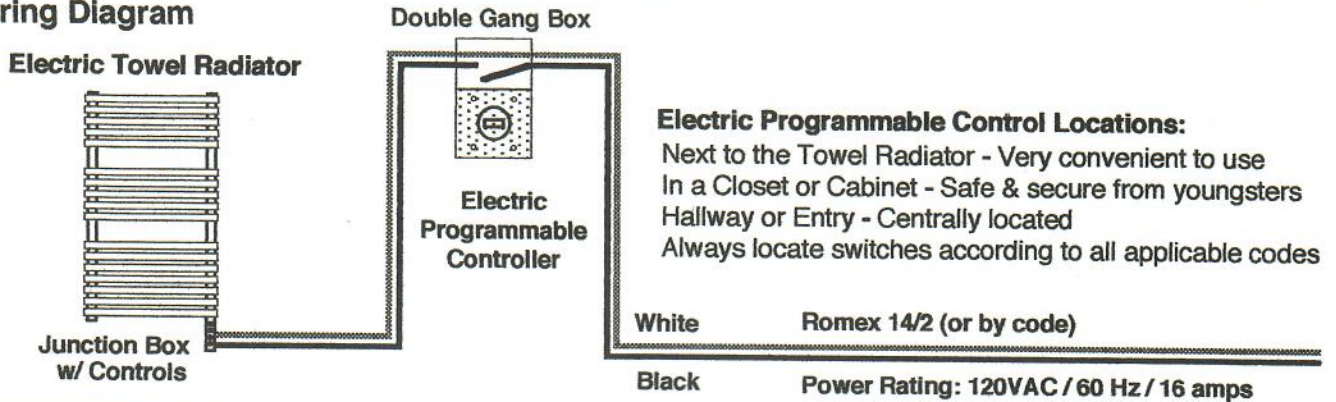


**Electric Programmable Controller (EPC)** may be used with all direct wired Runtal Electric Towel Radiators and provides efficient zoning and convenient ON / OFF operation. The Electric Programmable Controller is designed to be installed in a double gang electrical box mounted at eye level, in a location convenient for viewing the LCD display. Use the Electric Programmable Controller to provide a warm bathroom first thing in the morning, to avoid heating the entire house in the spring and fall, and to provide comfortable heat to meet your daily routine.

- |                 |  |
|-----------------|--|
| <b>Features</b> | <ul style="list-style-type: none"><li>* LCD Display of Day &amp; Time</li><li>* Up to 8 different ON / OFF cycles per day</li><li>* Seven day individual programming function</li><li>* Block programming of up to seven days per ON / OFF cycle</li><li>* Manual ON / OFF override</li><li>* 150 hour built in battery saves programs in case of power outage</li></ul> |
|-----------------|--|

## Wiring Diagram



## Programming Instructions

- 1) Set the Day & Time  
Slide the upper right toggle switch to position   
Press the day button repeatedly until the correct day is indicated by the pointer  
Press the h+ and m+ buttons repeatedly until the correct time and AM or PM is displayed
- 2) Set the ON Program start time  
Slide the upper right toggle switch to position   
Program 1 should be on display with the light bulb symbol for the ON programs  
Press the day button to choose the correct day or block of days  
Press the h+ and m+ buttons repeatedly until the correct time and AM or PM is displayed
- 3) Set the OFF Program stop time  
Scroll to program 2 by pushing the program button   
Press the day button to choose the same day or block of days as program 1  
Press the h+ and m+ buttons repeatedly until the correct time and AM or PM is displayed  
This completes the first pair of programs (1&2), seven more pairs are available for programming  
To exit programming and make operational, return the toggle switch to RUN
- 4) Automatic Operation  
Slide the upper left toggle switch to position Auto  
All programmed pairs will operate the Towel Radiator automatically  
Programmed pairs must include consistent day blocks for proper operation  
The Skip button allows you to skip a program without deleting it from the memory
- 5) Manual Operation  
Slide the upper left toggle switch to position On or Off  
The Towel Radiator will remain On or remain Off
- 6) Clearing the Programs  
To Clear the memory on the Programmable Controller, press the reset button with an open paper clip  
The Programmable Controller will then need to be completely reset including the time and day